



## Adhesion resistance of glued parts

### Objective

This test is used to evaluate the resistance of glued joints between various parts. This test can be performed as-is or after ageing.

### Principle

The test consists in taking a sample representative of the joint to be tested, and subjecting it to a constant tensile force in order to measure the separation forces. The result corresponds to the adhesion strength expressed in daN/cm\*.


\* Decanewton per centimetre.

Type: [Physical and mechanical test](#)

Standard: [EN ISO 17708](#)

Product: [Leathergoods](#)

Criteria: [Mechanical resistance](#)

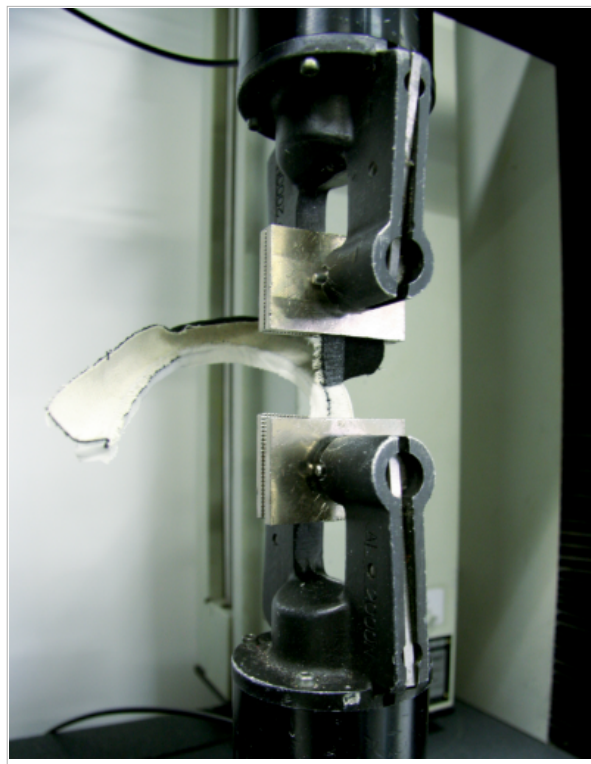

*Last modified on 2025-03-27*